


Poly Crystalline DCR PV Modules



PIX PD2 72
305-335 Wp

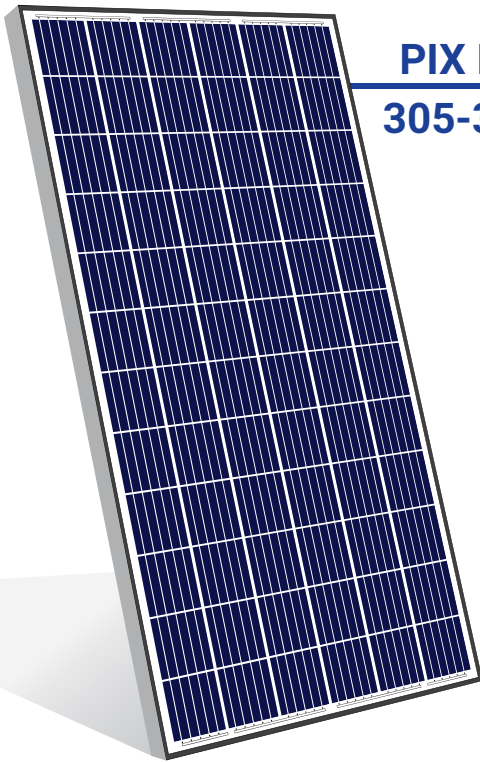

Power Tolerance
+4.99Wp



Efficiency Upto
16.88%



Module Warranty
10 Years



Output Warranty
25 Years

KEY FEATURES



PID Resistance with long term reliability.



Better Performance even at low irradiation.



Maximum System Voltage:
1500 V DC.



Increased string length & low
BOS cost.



Withstand upto **5400 Pa** of
snow load.



Withstand upto **2400 Pa** of
wind load.



Rigorous Testing Criteria
100% EL Inspection ensuring
defect-free modules.

IDEAL FOR: Utility Projects, Commercial & Industrial Projects, Residential Projects, Institutional Projects, Off-grid Projects

PIXON GREEN ENERGY PRIVATE LIMITED

Corporate Office: 2nd Floor, Star Avenue, Nr. Moti Tanki Chowk, Gymkhana Road, Rajkot - 360001. Gujarat, India.

Manufacturing Unit: Rajkot - Jamnagar Highway,
PO: Depaliya, TA: Padadhari, Rajkot - 360110. Gujarat, India.

ABOUT PIXON

PIXON is a venture of the Marwadi group. It is equipped with the state-of-the-art technology and turnkey machinery of 400 MW line capacity for solar modules and houses clean room environment facility to 800 MW manufacturing line for EVA films. As the world adheres to solar energy revolution, PIXON envisions to globally provide efficient solar energy products and solutions. Thus, enhance and contribute to Global Climate Sustainability.

CERTIFICATIONS

ALMM



PTL US
CERTIFIED



ALMM APPROVED

IEC (International Electrotechnical Commission)

- IEC 61215-1:2016
- IEC 61215-2:2016
- IEC 61730-1:2016
- IEC 61730-2:2016
- IEC TS 62804-1
- IEC 61701 End.2:2011 Severity-6
- IEC 61853-1
- IEC 60904-1
- IEC 62716:2013

BIS: Bureau of Indian Standards

- IS 14286:2010
- IS 61730-1:2004
- IS 61730-2:2004

US Certification

- UL 61215-1:2017
- UL 61215-2:2017
- UL 61730-1:2017
- UL 61730-2:2017

ISO Certification

- ISO 9001:2015
- ISO 14001:2015
- ISO 45001:2018 (OHSAS)

CE Mark Testing & Certification

CLASS II



**Solar is
the new Green!**

PIX PD2 72 335

M2

335W

16.88%

+4.99Wp

<2.5%

Poly Crystalline DCR PV Modules


5 BB
FULL CELL

MAXIMUM
POWER OUTPUT

MAXIMUM
EFFICIENCY

POWER
TOLERANCE

FIRST YEAR
POWER DEGRADATION

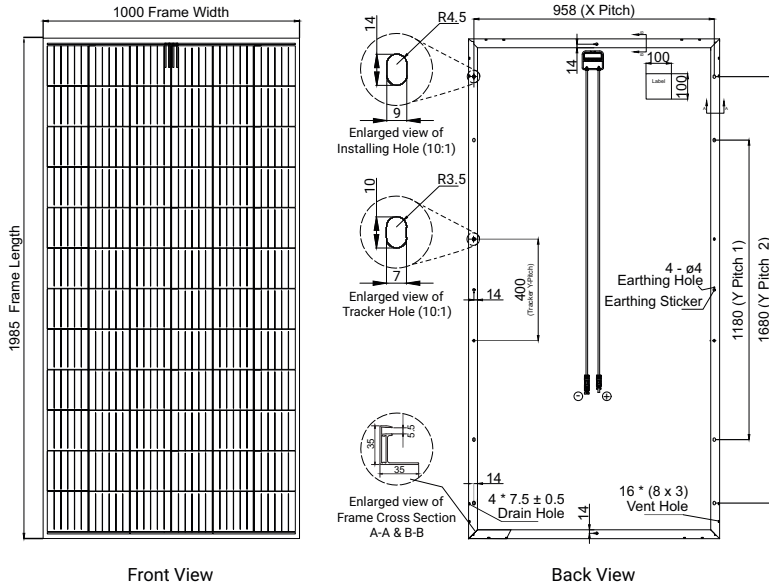

Front View

Back View

*All Dimensions are in mm.

*Cable Length may vary based on Requirements.

MECHANICAL DATA

Cells Specifications (Number, Size)	72 Cells, 157 mm X 157 mm
Module Dimensions	1985 mm X 1000 mm X 35 mm
Weight	22 kg
Glass	High Transmission Low Iron Tempered Glass, AR coated, 3.2 mm (T)
Embedding	Low Shrinkage PID Resistance EVA, UV Resistant
Backsheet	PVDF
Junction Box	IP 68 Rated
Number of Diodes	3 Bypass Diodes
Cables & Connectors	Cable Length 1200mm, 4mm ² , MC4 Connectors, IP 68
Frame	Anodized Aluminum Alloy Silver Profile (Black Frame Available on Request)

MECHANICAL LOAD TEST PARAMETERS

Front Side Maximum Static Load	5400Pa
Rear Side Maximum Static Load	2400Pa

TEMPERATURE RATING

NOCT (Nominal Operating Cell Temperature)	43°C (±2°C)
Temperature Coefficient of Current (Isc)	0.0626% /°C
Temperature Coefficient of Voltage (Voc)	-0.3090% /°C
Temperature Coefficient of Power (Pmax)	-0.4080% /°C

OPERATING PARAMETERS

Operational Temperature	-40°C ~ +85°C
Maximum System Voltage	1500V DC
Maximum Series Fuse Rating	15A

ELECTRICAL PARAMETERS AT STC (AM 1.5g, 1000 W/m², 1m/s, 25°C) According to EN 60904-3

	Pmax [Wp]	305	310	315	320	325	330	335
Peak Power	Pmax [Wp]	305	310	315	320	325	330	335
Module Efficiency	η [%]	15.39	15.63	15.87	16.13	16.37	16.62	16.88
Open-Circuit Voltage	Voc [V]	44.92	45.14	45.28	45.43	45.64	45.93	46.15
Short-Circuit Current	Isc [A]	8.93	8.95	8.99	9.10	9.13	9.16	9.23
Max Rated Voltage	Vmp [V]	37.94	38.16	38.52	38.76	38.97	39.33	39.46
Max Rated Current	Imp [A]	8.05	8.13	8.18	8.26	8.34	8.40	8.49

ELECTRICAL PARAMETERS AT NMOT (AM 1.5g, 800 W/m², 20°C) According to EN 60904-3

	Pmax [Wp]	226.36	229.94	233.54	237.29	240.89	244.86	248.30
Peak Power	Pmax [Wp]	226.36	229.94	233.54	237.29	240.89	244.86	248.30
Open-Circuit Voltage	Voc [V]	42.14	42.35	42.48	42.62	42.82	43.09	43.30
Short-Circuit Current	Isc [A]	7.23	7.25	7.28	7.37	7.40	7.42	7.48
Rated Voltage	Vmp [V]	35.60	35.80	36.14	36.36	36.56	36.90	37.02
Rated Current	Imp [A]	6.36	6.42	6.46	6.53	6.59	6.64	6.71


PACKAGING CONFIGURATION

Modules per Box	31 Pieces
Modules per 40' Container	682 Pieces


WARRANTY

Product Warranty	10 Years
Performance Warranty	25 Years Linear Power Warranty

CERTIFICATIONS

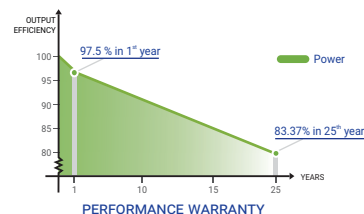

Average relative efficiency reduction of 5% at 200 W/m² According to EN 60904-1. Measuring uncertainty ±3%



*Due to continuous product updation, specifications may change without notice. Kindly refer to the website for latest information : www.pixonenergy.com



Solar is the new Green!